



INSTANT FROG®

PATENTED MINERAL POOL SANITIZER

Instruction Manual



- ELIMINATES DAILY DOSING FOR LESS WORK
- SPARKLING WATER FOR IN GROUND POOLS

Thank you for purchasing the INSTANT FROG®. With mineral pool care, your water will feel softer, shine brighter while reducing chemicals and overall pool maintenance.

Specifications

- For inground pools ONLY.
- Lasts 6 months once product is wetted.
- Easy to set reminder dial for product replacement.
- Reduces chlorine use up to 50%*. (With chlorinator or floater turn setting down or use fewer tablets.)

Pool Start Up

1. Balance water according to the chart .

WATER BALANCE GUIDELINES

pH:	7.2-7.8
Total Alkalinity:	60-120 ppm
Calcium Hardness:	150-400
Total Dissolved Solids:	<1500
Stabilizer	20-80 ppm
Free Chlorine:	0.5-1.0 ppm

2. Shock pool to remove all contaminants. (Follow manufacturer's directions.)

*Compared to the minimum EPA recommended chlorine level of 1.0 ppm for a stabilized swimming pool

Covered by one or more of the following U.S. Patent Numbers: D460,325; D460,664; 6,217,892; 6,383,507; 6,500,334; 6,551,609; 6,562,242; 6,652,871; 6,685,827; 6,908,551 and other U.S. and Foreign Patents Pending
• EPA Est. No. 071209-AZ-001
553100543R2 • 20-48-0142E

KING TECHNOLOGY, INC.

530 11th Avenue South • Hopkins, MN 55343
952-933-6118 • FAX 952-933-2206
www.kingtechnology.com




Installing INSTANT FROG®


1. Set reminder dial on the INSTANT FROG® to 6 months from date of installation. Turn dial by hand or with a coin if needed.



2. Remove skimmer cover and skimmer basket handle if applicable. Insert the INSTANT FROG® into skimmer basket. **DIAGRAM A**

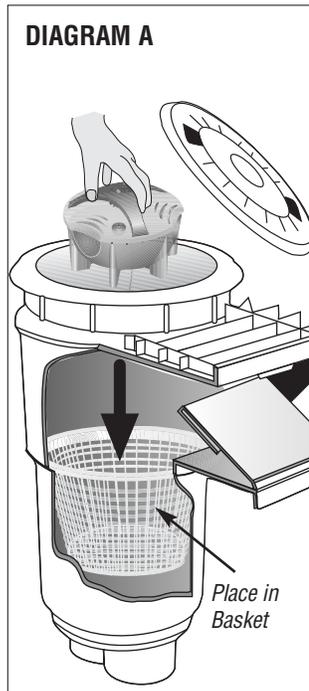

3. If using the INSTANT FROG® with a suction side automatic cleaner installed through the skimmer, it will be necessary to use a vac plate that may come with the skimmer or automatic cleaner. **DIAGRAM B**

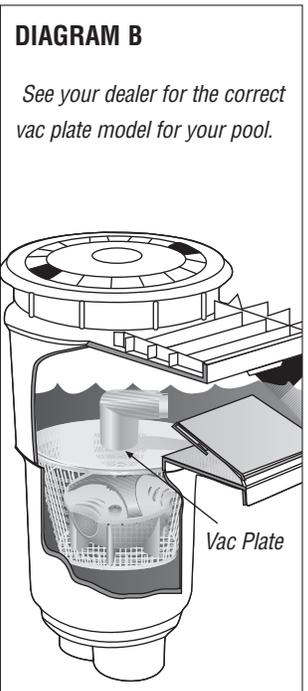

Regular Pool Care



1. Run pump and filter at least 8 hours per day.



2. Regularly test water for pH, total alkalinity and chlorine levels.



3. Maintain at least 0.5 ppm chlorine level at all times. A chlorinator or floater is recommended. If using chlorine pucks in the skimmer basket, place them under the INSTANT FROG®



4. Shock pool every two weeks or as needed to maintain water quality. Follow label directions on the shock treatment used.



5. Check filter gauge regularly and clean or backwash when needed per the manufacturer's directions.

6. Periodically clean skimmer basket of excess debris as normal.

7. REMEMBER TO REPLACE THE INSTANT FROG® EVERY 6 MONTHS OR AFTER ONE POOL SEASON WHICHEVER IS SHORTER.